

QGS 系列标准气缸


Series standard cylinder

QGSS 系列串联气缸

series double cylinder



图形符号 symbols

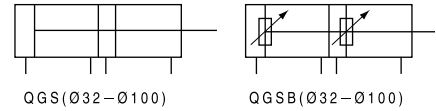

产品特点 Features


QGSS串联气缸是由两个缸径和行程相同的QGS单活塞双作用气缸组成，其拉力为QGS气缸的两倍，推力为QGS气缸的推力和拉力之和，该气缸亦可作增力气缸用。

QGSS serial connected cylinder is made up by two same QGS single piston double acting cylinder. The pull force is two times than QGS cylinder and push force is sum of QGS cylinder's force and push. It can be used as stronger power cylinder.

技术参数 Specification

| | |
|---------------------------------------|---|
| 工作介质 / Working medium | 干燥洁净含油雾的压缩空气 / Dry and clean compressed air |
| 工作压力范围 / Working pressure range (MPa) | 0.15-1 |
| 耐压 / max pressure (MPa) | 1.5 |
| 工作温度 / Working temp. (°C) | -20~70 |

外形尺寸 Outlook & Dimension

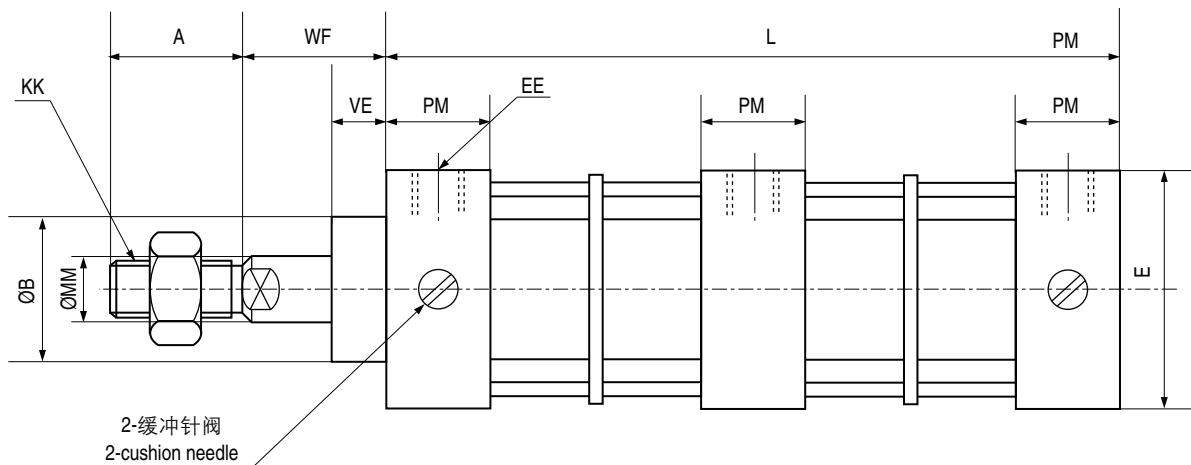

| 缸径Bore | A | B | E | WF | VE | PM | MM | EE | KK | L |
|--------|----|----|-----|----|----|----|----|------|----------|-----|
| 40 | 24 | 32 | 55 | 30 | 23 | 25 | 16 | G1/4 | M12x1.25 | 181 |
| 50 | 32 | 36 | 65 | 35 | 25 | 25 | 20 | G1/4 | M16x1.5 | 187 |
| 63 | 32 | 36 | 80 | 35 | 25 | 30 | 20 | G3/8 | M16x1.5 | 220 |
| 80 | 40 | 45 | 95 | 46 | 30 | 30 | 25 | G3/8 | M20x1.5 | 226 |
| 100 | 40 | 50 | 115 | 51 | 35 | 35 | 25 | G1/2 | M20x1.5 | 241 |