


KJ 系列 截止式换向阀 Series solenoid valve

K25J 系列二位五通换向阀 series 5/2-ways solenoid valves



图形符号 symbols

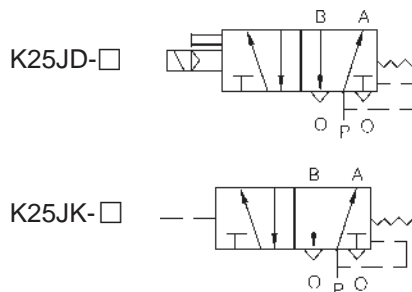


产品特点 Features

K25J系列二位五通截止式换向阀，是一机部换向阀联合设计产品，具有结构合理，动作可靠。

Designed by the first ministry of mechanical industry of people's republic of china. It features: streamlined structure dust resistance powerful and reliable actions

型号注释 Order Code

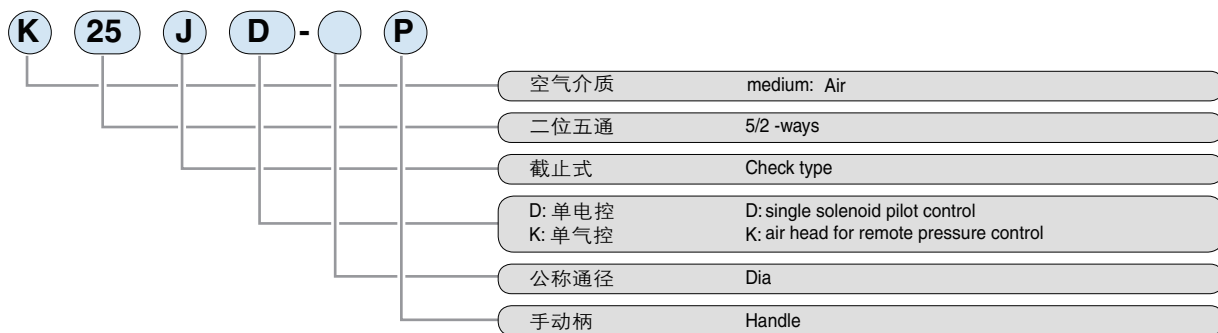

技术参数 Specification

型号Type	K25JD-6	K25JD-8	K25JD-10	K25JD-15	K25JD-20	K25JD-25
参数Item	K25JK-6	K25JK-8	K25JK-10	K25JK-15	K25JK-20	K25JK-25
公称通径Dia	Ø6	Ø8	Ø10	Ø15	Ø20	Ø25
介质温度和环境温度Temp ambient/medium(°C)	-5~50					
工作压力范围Working pressure range(MPa)	0.15~0.8					
泄漏量Leakage rate(mL/min)	≤10	≤10	≤25	≤25	≤50	≤50
换向时间Direction diverting time(sec)	≤0.06	≤0.06	≤0.08	≤0.08	≤0.12	≤0.12
最高切换频率Max swith-over frequency(Hz)	≥10	≥10	≥8	≥8	≥4	≥4
有效截面积S值Effective sectional area S valve(mm²)	≥10	≥20	≥35	≥60	≥120	≥190
额定流量Flow(m³/h)	2.5	5	7	10	20	30
工作电压Voltage(v)	If solenoid pilot control 电控: AC220、110、36 DC48、24、12 [电压波动允许范围fluctuation+10%~-15%]					
寿命 (万次) work Life (Million times)	≥150					
控制压力Control pressure (MPa)	≥0.2					